

# Filter solutions for HAM RADIO




## PerfoBox series of Filters and Multiplexers

### «PerfoBox-1500DX» Band Pass Filter 3,5 MHz (80 m)

#### Typical specifications:

Impedance:	50 Ohm
Maximum ICAS power:	1500 W
Losses in the pass band:	typical $\leq 0,45$ dB
VSWR:	typical $\leq 1: 1,15$
Rejection on a nearby band:	typical $\geq 50$ dB
Rejection on 2F band:	typical $\geq 85$ dB
Cooling fan ( <i>option</i> ):	12VDC, 2200RPM, 29.9CFM, Phoenix pluggable connector
Size:	450x150x134 mm / 18" x 6" x 5"
Net weight (2 pcs., <i>option fan incl.</i> ):	$\leq 2,65$ kg / 6 lbs

#### Serial number #1218-665 as measured:

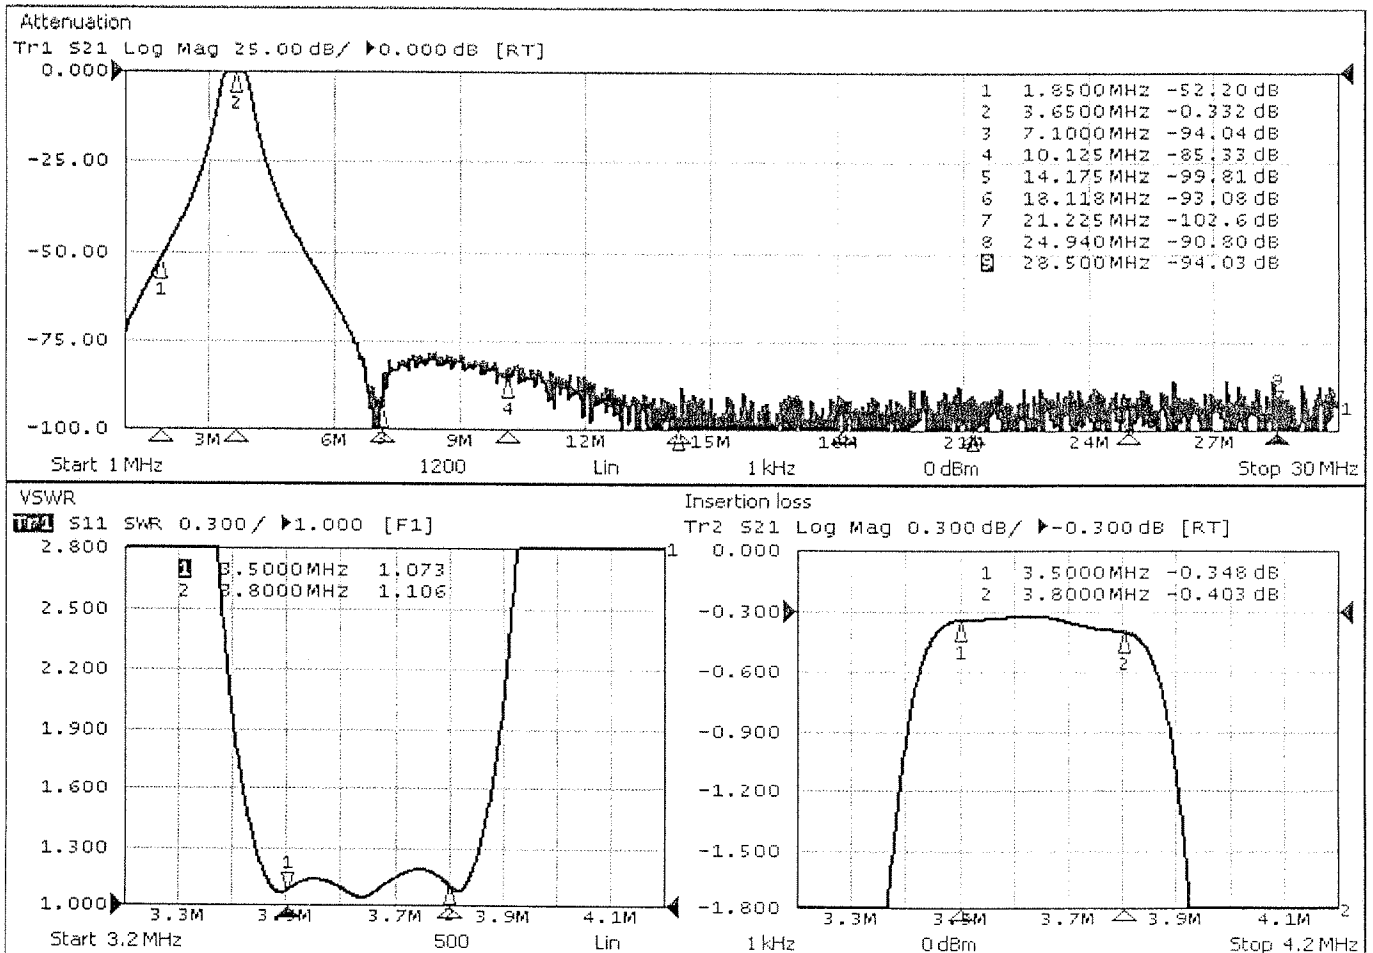

QC: